Transport Platforms Bocker Superlift LX2024 > A51





Model	Superlift LX2024 A51
Capacity	1700kg or 7 Persons
Platform dimensions (L x W)	5.10m x 1.40m
Max lifting height	200m
Speed	12m/min
Height of mast section	1.5m
Weight of mast section	140kg / 165kg
Tie spacing (Max)	15m
Mast top	9m
Motor capacity	2x 7.5kW
Rated supply required	32 Amp / 63 Amp
Electrical supply (V/Hz)	415/3/50
Control voltage (V)	230


Summary

The Bocker LX2024 A51 is a robust and versatile hoist and can be configured to carry passengers and materials, with a total capacity of up to 1700kg or 7 persons.

With the options for both single or twin cage operation, along with C gate options available, the LX2024 is highly versatile and can be adapted to suit virtually any site's needs. The compact space-saving design allows for a total of 5.10m x 1.40m of floor space.

Product Advantages


- > Mast compatible with Giant Lift hoist for a combination hoist
- Variable ties interface directly with the building or scaffold >
- Economic automatic control, no manual switching >
- Mechanical and electrical locking mechanisms >
- > Single or Twin cage operation
- Operating height of up to 200m >
- Up to 15m vertical tie spacings >
- Automated lubrication system >
- Flexible modular construction >
- > Operating speed of 12m/min
- > C Gate options also available

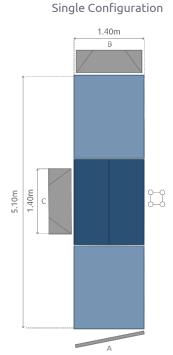

www.ntp-group.com

Images are illustrative and may differ in appearance to actual product. Stated specifications are subject to change without notice. E&OE. Power supply can vary from 32A – 63A subject to model availability.





01832 273 060









