
Transport Platforms Bocker Superlift MX1524 > A42

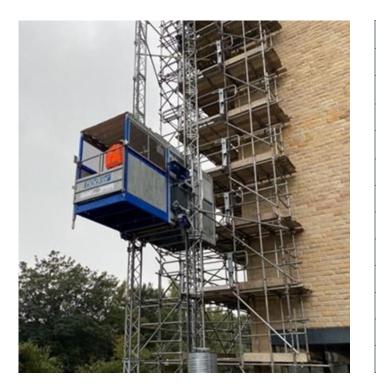

		L	
		Г	
\sim	1000		
	ACC	:55	5

Model	Superlift MX1524 A42	
Capacity	1200kg or 7 Persons	
Platform dimensions (L x W)	4.25m x 1.40m	
Max lifting height	200m	
Speed	12m/min	
Height of mast section	1.5m	
Weight of mast section	55kg	
Tie spacing (Max)	10m	
Mast top	3m	
Motor capacity	2x 7.5kW	
Rated supply required	32 Amp	
Electrical supply (V/Hz)	415/3/50	
Control voltage (V)	230	


Summary

The Bocker MX1524 A42 is a robust and versatile hoist and can be configured to carry passengers and materials, with a total capacity of up to 1200kg or 7 persons.

The dual mast system allows this machine to reach a higher, allowing for further versatility. The compact spacesaving design allows for a total of 4.25m x 1.40m of floor space.

Product Advantages

- Variable ties interface directly with the building or scaffold >
- Payload of 1200kg (evenly distributed) or 7 persons >
- Twin mast design for reduced tie and base loading >
- Mechanical and electrical locking mechanisms >
- Dual controls designed for ease of operation >
- Robust construction & fully galvanised >
- Operating height of up to 200m >
- Automated lubrication system >
- Flexible modular construction >
- > Operating speed of 12m/min



BUILDER'S

COMS

www.ntp-group.com

01832 273 060

Images are illustrative and may differ in appearance to actual product. Stated specifications are subject to change without notice. E&OE.

SSI







